

# GreenWall 50 and 80

**Product**

GreenWall is Milford’s own quality trellis system series made of stainless steel. GreenWall 50 and 80 are the classic and simple trellis spacers where the wire is threaded through the holes.

**Areas of use**

The size of the wall bracket is chosen based on the trellis system’s size as well as the plant species and type.

**GreenWall 50** is the smallest wall bracket, which is suited for smaller plants that are not likely to develop heavy stems.

**GreenWall 80** is for the taller plants, which gets a little heavier and requires more space between the wall and the wire.

**Description**

**GreenWall 50 (GW50/50/S) and GreenWall 80 (GW50/80/S).**

- Stainless steel wall bracket for universal attachment.
- The system is installed with a maximum of 3 meters between each wall bracket.

**GreenWall wire tensioners (GW/WT4/M6X55)**

- Stainless steel wire tensioners for 4 mm wire.


**240.4** Stainless steel wire Ø4 mm.

- Wire is sold in rolls of 25, 50 and 100 meters.

*Installed according to Milford’s instructions.*



*Liveable cities*

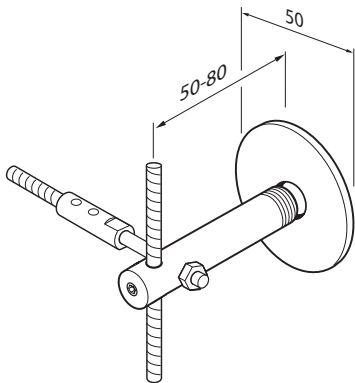

| Code         | Description                      | Material        | Distance from wall | Base plate diameter | weight/gr |
|--------------|----------------------------------|-----------------|--------------------|---------------------|-----------|
| GW50/50/S    | Wall bracket with fixing         | Stainless steel | 50 mm              | 50 mm               | 155       |
| GW50/80/S    | Wall bracket with fixing         | Stainless steel | 80 mm              | 50 mm               | 202       |
| GW/WT4/M6X55 | Wire tensioner, 4 mm wire        | Stainless steel |                    |                     | 46        |
| 240.4        | 4 mm dia. wire (25, 50 or 100 m) | Stainless steel |                    |                     | 37 gr/m   |