

ALUEXCEL™

Product
L-shaped aluminium edging. Flexible and formable.
Fastened with steel fixing stakes.

Areas of use
For boundary edging of asphalt, rubber paving, gravelled surfaces and paving stones. Well-suited for parking areas, playgrounds, parks, roof gardens and alongside buildings.

Notes
Edging in untreated aluminium.

Length: 2500 m.

For mounting on a fixed substrate, included AEGN steel spikes are used, minimum 7 pcs. per length.

For mounting on existing asphalt or concrete, concrete nails are used, minimum 7 pcs. per length *

Contact Milford for 90° corners.



To be installed according to Milford's instructions.

* Concrete nails are not included.



Product no.	Thick.	Height	Width	Material	Spikes	Min. radius
XLAE18M/S	5 mm	18 mm	30 mm	Unt. aluminium	-	1000 mm
XLAE25M/S	5,5 mm	25 mm	45 mm	Unt. aluminium	7 per. l.	1000 mm
XLAE40M/S	6 mm	40 mm	45 mm	Unt. aluminium	7 per. l.	1000 mm
XLAE50M/S	6 mm	50 mm	45 mm	Unt. aluminium	7 per. l.	1000 mm
XLAE65M/S	6 mm	65 mm	45 mm	Unt. aluminium	7 per. l.	1000 mm
XLAE75M/S	6,5 mm	75 mm	70 mm	Unt. aluminium	7 per. l.	1000 mm
XLAE100M/S	6,5 mm	100 mm	70 mm	Unt. aluminium	7 per. l.	1500 mm
XLAE150M/S	8,5 mm	150 mm	70 mm	Unt. aluminium	7 per. l.	1500 mm

Product no.	Product	Height	Width
XLAESS/S	Unt. aluminium joining piece	15 mm	100 mm
XLAESS/L	Unt. aluminium joining piece	25 mm	100 mm
AEGN	Steel fixing stake, galv. steel	250 mm	Ø8 mm

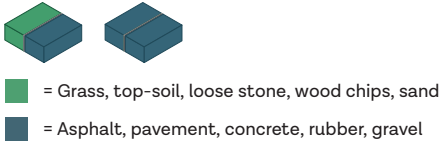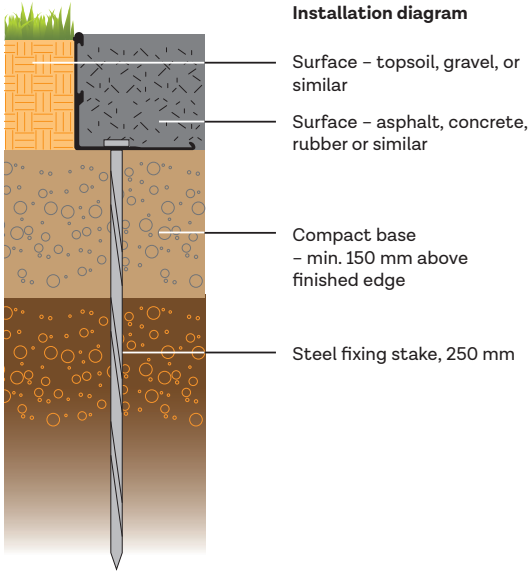

Liveable cities

ALUEXCEL™ LINEAR

Product

L-shaped aluminium edging with linear reinforcement. For long, straight stretches. Fastened with steel fixing stakes.

Areas of use

For boundary edging of asphalt, rubber paving, gravelled surfaces and paving stones. Well-suited for parking areas, playgrounds, parks, roof gardens and alongside buildings.

Can easily be connected to the flexible AluExcel profiles.

Notes

Edging in untreated aluminium with linear reinforcement. Aluminium is a 100% reusable material.

Length: 2500 m.

For mounting on a fixed substrate, included AEGN steel spikes are used, minimum 7 pcs. per length.

For mounting on existing asphalt or concrete, concrete nails are used, minimum 7 pcs. per length *




Contact Milford for 90° corners.

To be installed according to Milford's instructions.

* Concrete nails are not included.

Product no.	Thick.	Height	Length	Material	Spikes
XLAE18L/S	5 mm	18 mm	30 mm	Ubh. aluminium	-
XLAE75L/S	6,5 mm	75 mm	70 mm	Ubh. aluminium	7 per length
XLAE100L/S	6,5 mm	100 mm	70 mm	Ubh. aluminium	7 per length
XLAE150L/S	8,5 mm	150 mm	70 mm	Ubh. aluminium	7 per length

Product no.	Product	Height	Width
XLAESS/S	Unt. aluminium joining piece	15 mm	100 mm
XLAESS/L	Unt. aluminium joining piece	25 mm	100 mm
AEGN	Steel fixing stake, galv. steel	250 mm	Ø8 mm

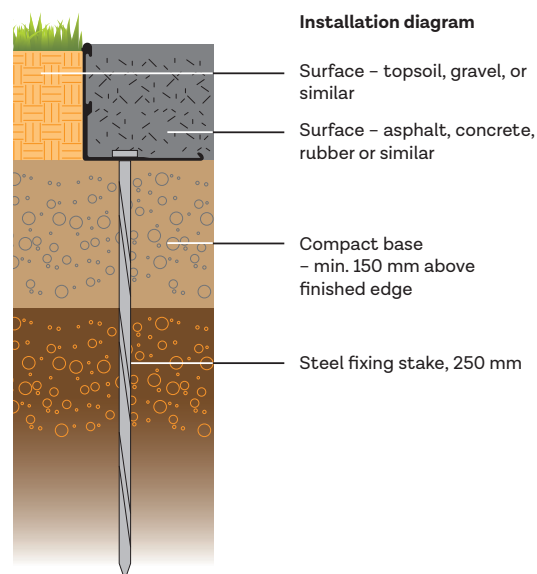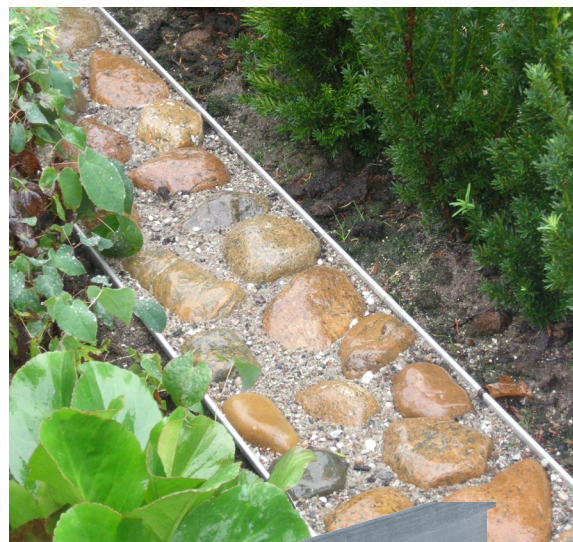

- = Grass, top-soil, loose stone, wood chips, sand
- = Asphalt, pavement, concrete, rubber, gravel